

## EXEMPLES : BALING WIRE


**Description :** Galvanised wire for baling recycled waste.

Galvanised pulp baling wire.

**Steel :** 0,4 to 0,7 % carbon.

**Tensite strenght :** 1000 to 1400 N/mm<sup>2</sup>.

**Coating :** - Electro-galvanised.

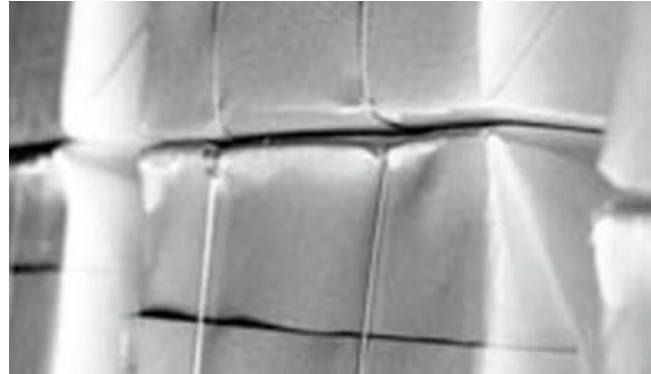

**Diameter :** 1,60 to 3,4 mm.

**Tolerances :** ± 0,02 to ± 0,05 mm according to wire diameter.

**Packaging :** - Orbit wound coils from 250 to 1 000 Kg.

Supplied with steel tape horizontal axis or vertical axis on pallets with or without lifting rings

	<b>ORBIT WOUND COILS</b>
<b>Type</b>	<b>PC</b>
<b>Weight of wire (Kg)</b>	250 / 1000
<b>Ø outside dia. (mm)</b>	800
<b>Ø inside dia. (mm)</b>	350 / 400
<b>Height (mm)</b>	300 / 900

Please note all weights shown are approximate, and issued for guidance only. All measurement are metric.

**Unwinding :** Dynamic or static. Unwinding systems are available on request.

**Important characteristics :** It is recommended to specify the diameter of your wire requirements in mm.

CONFLANDEY reserves the right to modify any of the above details in the pursuit of improvements in quality and service.

**CONFLANDEY INDUSTRIES**

3 RUE DU CHATEAU AMONCOURT - BP 21 70170 PORT SUR SAONE - FRANCE

Tél. : 33 (3) 84.91.38.38 - FAX : 33 (3) 84.91.47.04

[contact@conflandey-industries.com](mailto:contact@conflandey-industries.com)